




SIWT 1000

- Custom PLC Controlled with Data Logger
- 0.01 to 0.1 ppm Silver Ion

Model No.	SIWT 1000A80T	SIWT 1000A100T	SIWT 1000A80M	SIWT 1000A100M
Pipe Size	3" Triclover	4" Triclover	3" BSM	4" BSM
Flow Rate	200 - 1000 L/m			
Ag ⁺	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
Cu ⁺				
Flow Sensor	Insertion flow sensor with stainless steel fitting (Wetted parts materials Fitting)			
Voltage	110 or 240V AC			
Input Voltage	24 ~ 48 VDC			
Output Voltage	23 ~ 47 Volts			
Water Usage	16,785,600 Litre ~ 83,928,000 Litre (This is highly dependant on water quality)			

Model No.	SIWT 1000C80T	SIWT 1000C100T	SIWT 1000C80M	SIWT 1000C100M
Pipe Size	3" Triclover	4" Triclover	3" BSM	4" BSM
Flow Rate	200 - 1000 L/m			
Ag ⁺	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Cu ⁺	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Flow Sensor	Insertion flow sensor with stainless steel fitting (Wetted parts materials Fitting)			
Voltage	110 or 240V AC			
Input Voltage	24 ~ 48 VDC			
Output Voltage	23 ~ 47 Volts			
Water Usage	16,785,600 Litre ~ 83,928,000 Litre (This is highly dependant on water quality)			

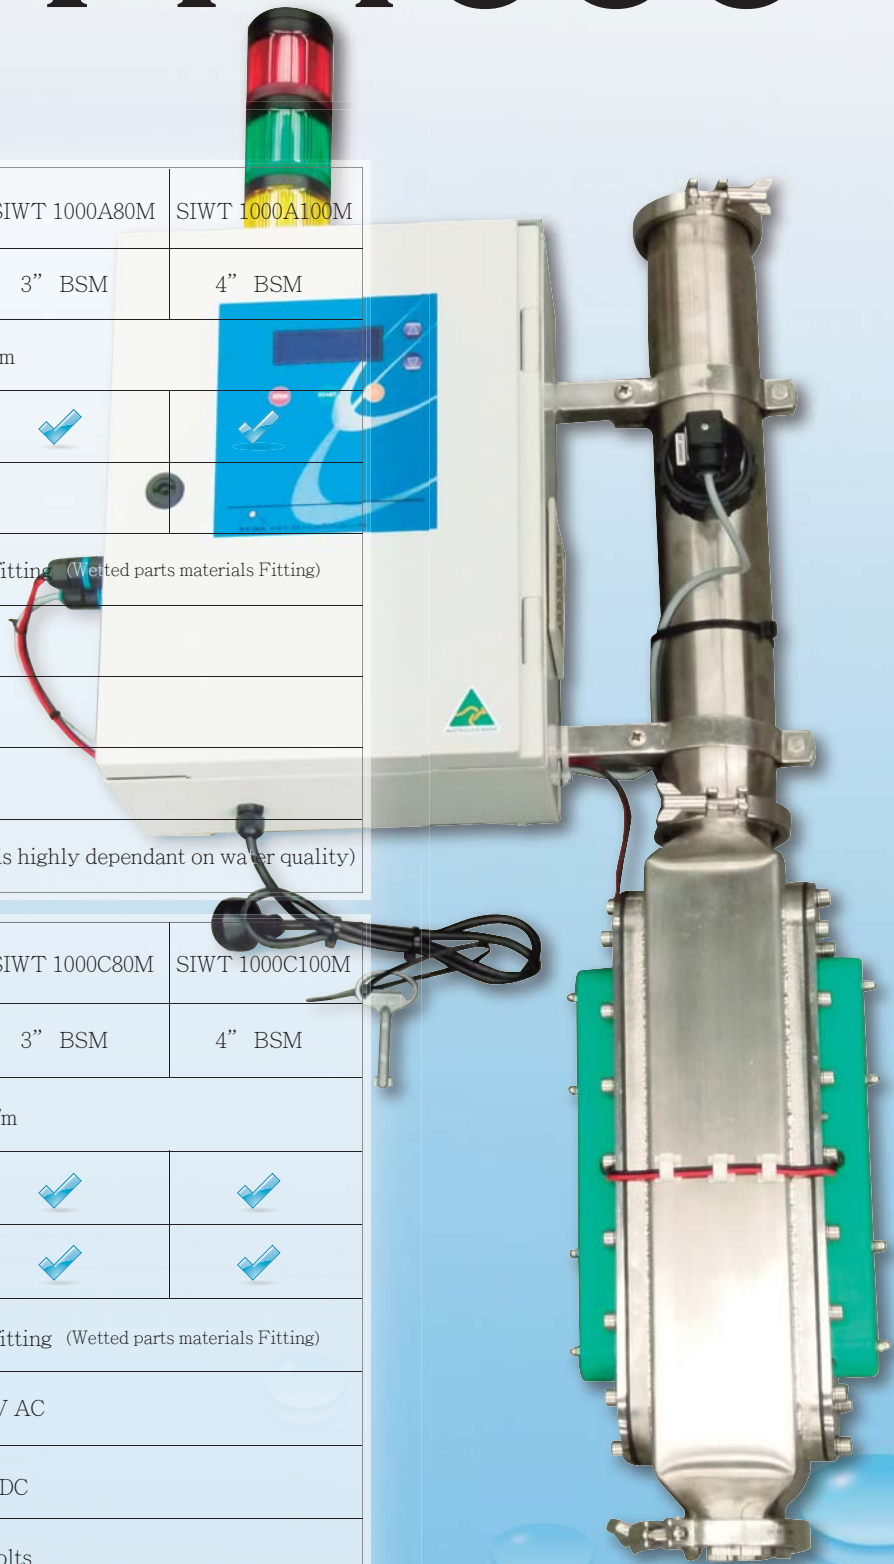

TEL: +61 3 9701 7089 Email: sales@akwa-solutions.com
 FAX: +61 3 9701 3243 www.akwa-solutions.com